



Rugged die cast aluminum 6" diameter housings. Threaded, gasketed clear glass globe for durable weatherproofing and easy relamping. 1" long, 1/2" threaded nipple included for easy mounting. 100 Watt max. Incandescent lamp not supplied. Fluorescent lamp supplied.

Color: Black

Weight: 4.2 lbs

Project:	Туре:
Prepared By:	Date:

Lamp Info		Ballast	Ballast Info		
Type	13W Quad	Type	NPF 120V		
Watts	13W	120V	0.3A		
Shape/Size	N/A	208V	N/A		
Base	N/A	240V	N/A		
ANSI	N/A	277V	N/A		
Hours	10,000	Input Wa	Input Watts 17.00W		
Lamp Lumens	s 860				
Efficacy	50.6 LPW				

# **Technical Specifications**

## Listings

#### **UL Listed:**

Suitable for wet locations. Suitable for mounting within 4 feet of the ground.

## **Electrical**

## Socket:

Medium base porcelain with all copper electrical parts and 20" leads, including a ground lead

# Voltage:

120 volts AC

#### Construction

#### Globes:

Threaded, gasketed globe protects against weather, garden sprinklers and insects. Clear glass GL 100 globes standard for 4 Tier. Clear glass GL60 globes standard for 3 Tier. GL100 white globes also available for attractive appearance and glare reduction.

#### Housing:

Die-cast aluminum housing with powder coat finish

#### **Mounting Stem:**

Optional 12" mounting stem with 1/2" threads on both ends available <u>here</u>.

### **Optical**

#### F13:

Compact Fluorescent 13W

#### Lamp:

Fluorescent lamp supplied. 13 watt quad tube. NPF 120V ballast.GX23-2 base Quad lamps, 120V.


#### Other

## **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

# LL23B/F13



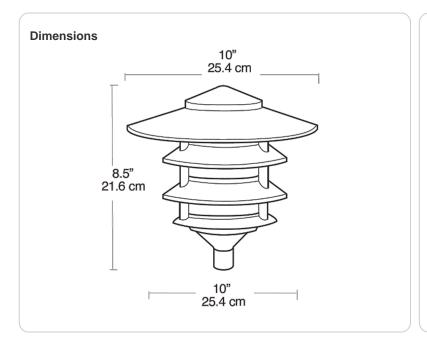

## **Features**

Rugged die cast aluminum housing with durable powder coating

Socket with all copper electrical parts and 20" leads

Quick and secure installation with one corrosion-proof screw

Threaded, gasketed globes for durable weatherproofing and easy relamping

12" color matched mounting stem with 1/2" threads available Includes easy mounting 1/2" threaded nipple